

Sonesse 30 WireFree Li-ion RTS - 12mm

PRODUCT SPECIFICATIONS



Designed for silence and simplicity

The new silent motor for residential medium to large blinds, powered by a built-in rechargeable battery.

Somfy +

Quiet operation



Lithium-ion +

Embedded battery motor:

- All-in-one
- Aesthetic
- Compact and light
- 12mm tongue bracket compatibility
- Battery power indicator
- Direct connector on the head for rapid recharging



Built-in battery motor

Powered by a compact and light lithium-ion battery.



"my" favourite

In one click move the blind to your favourite position.



Wirefree

For quicker installation.



Compatible with Situo Variation functions



Soft start and soft stop




Adjustable speed

From 10 to 28 rpm.



Information feedback

Low battery indicator on the controller interface and easy re-setting.



New Head Design

White and thin head for discrete blending



Slats tilting



somfy®

Sonesse 30 WireFree Li-ion RTS - 12mm

BENEFITS FOR PROFESSIONALS

Easy Integration

- Suitable for tubes diameter 30 mm or more
- Fits either steel or aluminum tube
- Aesthetic white and thin motor head
- No external battery tube
- Delivery mode
- 12mm tongue bracket compatibility

Easy Installation

- No wiring
- No need to have electrical knowledge

Quick setting

- Recess program button + LED feedback
- Up and down end limits set via transmitter

BENEFITS FOR END USERS

Daily convenience and comfort

- Quiet operation
- Move your blinds effortlessly and remotely thanks to radio control
- Move your blind in one click to your favourite "my" position
- Smooth motion with adjustable speed

Aesthetic integration


- Quick and clean installation with no damage to walls
- No electrical wires or cords, free from danger of strangle
- No more charging cable on motor head

Easy use and maintenance

- Rechargeable battery (only recharge once per year)
- Low battery LED indicator
- Direct head plug for easy and convenient charging

COMPATIBLE END PRODUCTS

For interior applications only.

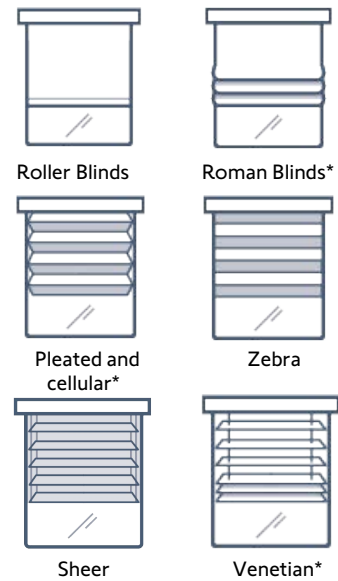

* Using CTS40

TECHNICAL DATA


Voltage Supply	12V DC
Index Protecting Rating	IP 30 (for indoor use only)
Limit Switch Type	Electronic
Temperature Working Range	0°C to 60°C
Temperature Storage Range	-20°C to 60°C
Insulation Class	Class III
Antenna	15 cm wire length must not be cut or lengthened. For greatest RF range, it must not be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

PERFORMANCES

Nominal Torque	2 Nm
Nominal Speed	20 rpm (Sonesse noise performance)
Adjustable Speed	10-28 by increment of 1-2 rpm
Sound Level	44 dBa (at nominal speed)
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Lifetime	Nominal 10 to 12 months
Power Supply	Li-ion embedded battery
Low Battery Indicator	LED
Item Number	1240512

DIMENSIONS

L (mm): 605mm
 Tube min Ø (int): 28.8 mm

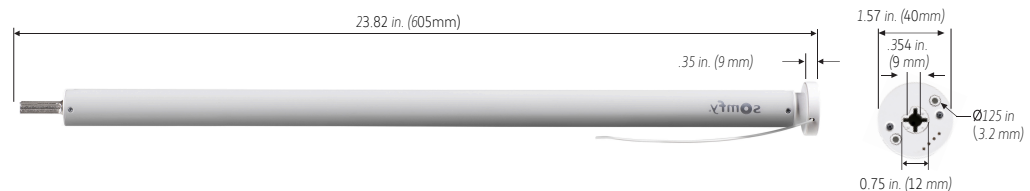

WIREFREE PARTS AND ACCESSORIES

These items have to be ordered separately		Accessories available:	
9025165	Li-ion Wirefree Charger (V2) - Inc. 4m Cable length	9021018	Sonesse 30 WF Acmeda Sys45 Crown and drive
9021131	20cm Ext Cable for Li-ion for Cassette (V2)	9021036	Sonesse 30 WF Acmeda Sys45 Heavy Crown and drive
9025293	WF Li-ion Solar Panel (Solar Pack)	9021037	Sonesse 30 WF HD Quantum Crown and drive
		9020699	Sonesse 30 WF HD 37 mm Crown and drive
		9020674	Sonesse 30 WF Rollease 1.5/38 mm Crown and drive
		9020675	Sonesse 30 WF Louvolite 40 mm Crown and drive
		9025811	Sonesse 30 WF Louvolite 45 mm Crown and drive
		9020676	Sonesse 30 WF to 400s adapter kit