

Sonesse 40 RTS

PRODUCT SPECIFICATIONS



Putting window coverings in motion with quiet precision

PRODUCT MAIN FUNCTIONALITIES



Designed for silence




Remote limit setting



Compatible with Solar protection functions



"my" favourite
In one click move the blind to your favourite position.



Slats tilting




Round head
for reduced dimensions.

Somfy+

Quiet operation and all the benefits of RTS technology.

RECOMMENDED TO SET WITH:

Universal test lead
(ref. 9 015 971)

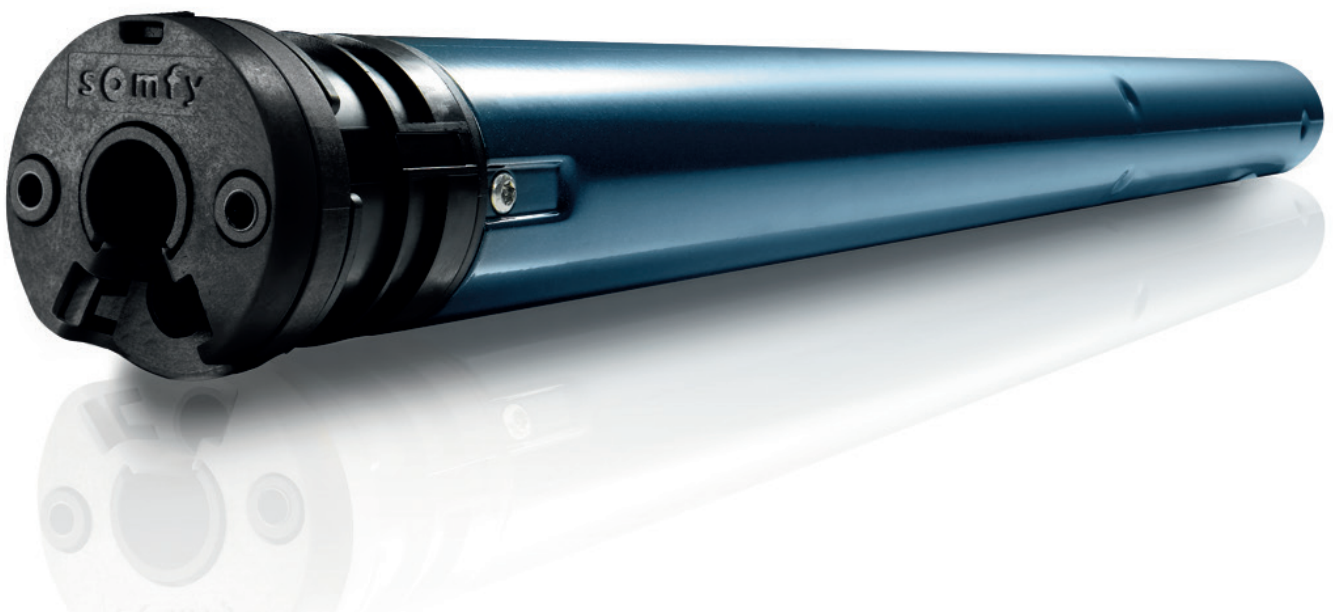

Sonesse 40 RTS

PRODUCT SPECIFICATIONS



BENEFITS FOR PROFESSIONALS

Easy Integration

- Suitable for tubes diameter 40 mm or more (internal diameter)
- Available with inline connector for ease of programming
- Integrated antenna

Setting from a distance

- Up and down end limits set by remote control
- Visual feedback of the product to confirm any step of setting and programming

BENEFITS FOR END USERS


Simple, effortless control

- Quiet operation
- Move your blinds effortlessly and remotely thanks to the radio control
- Move your blinds to your favourite "my" position in one click

Access to RTS product range for more benefits

- Solar protection functions compatibility

COMPATIBLE END-PRODUCTS

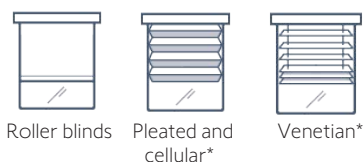

* Using CTS40

TECHNICAL DATA

| | |
|----------------------------------|---|
| Thermal Time | 4 minutes |
| Supply | AC |
| Index protection rating | IP 44 (indoor use only) |
| Limit switch unit | Electronic |
| Limit switch capacity | 250 turns |
| Temperature working range | 0°C to +60°C |
| Electric insulation | Class II |
| Capacity of memory | 12 different transmitters plus 3 wireless sensors |
| Coding | Rolling code with 16 million possibilities |

PERFORMANCES

| | 3/30 | 6/20 | 9/12 |
|--|-------------|---------|---------|
| Nominal Voltage | 230V / 50Hz | | |
| Torque (Nm) | 3 | 6 | 9 |
| Speed (rpm) | 30 | 20 | 12 |
| Rated Current (A) | 0.44 | 0.55 | 0.98 |
| End-limit unit versions available | RTS | RTS | RTS |
| Radio Frequency | 433, 42 MHz | | |
| Item Number | 1001573 | 1001577 | 1001581 |
| Item Number with inline connector | 1002091 | 1002092 | 1002157 |

DIMENSIONS

| L (mm) | 504 | 535 | 535 |
|--------|-----|-----|-----|
|--------|-----|-----|-----|

230 V

